





Ceramic Tiles of Italy

La Corte



MIRAGE

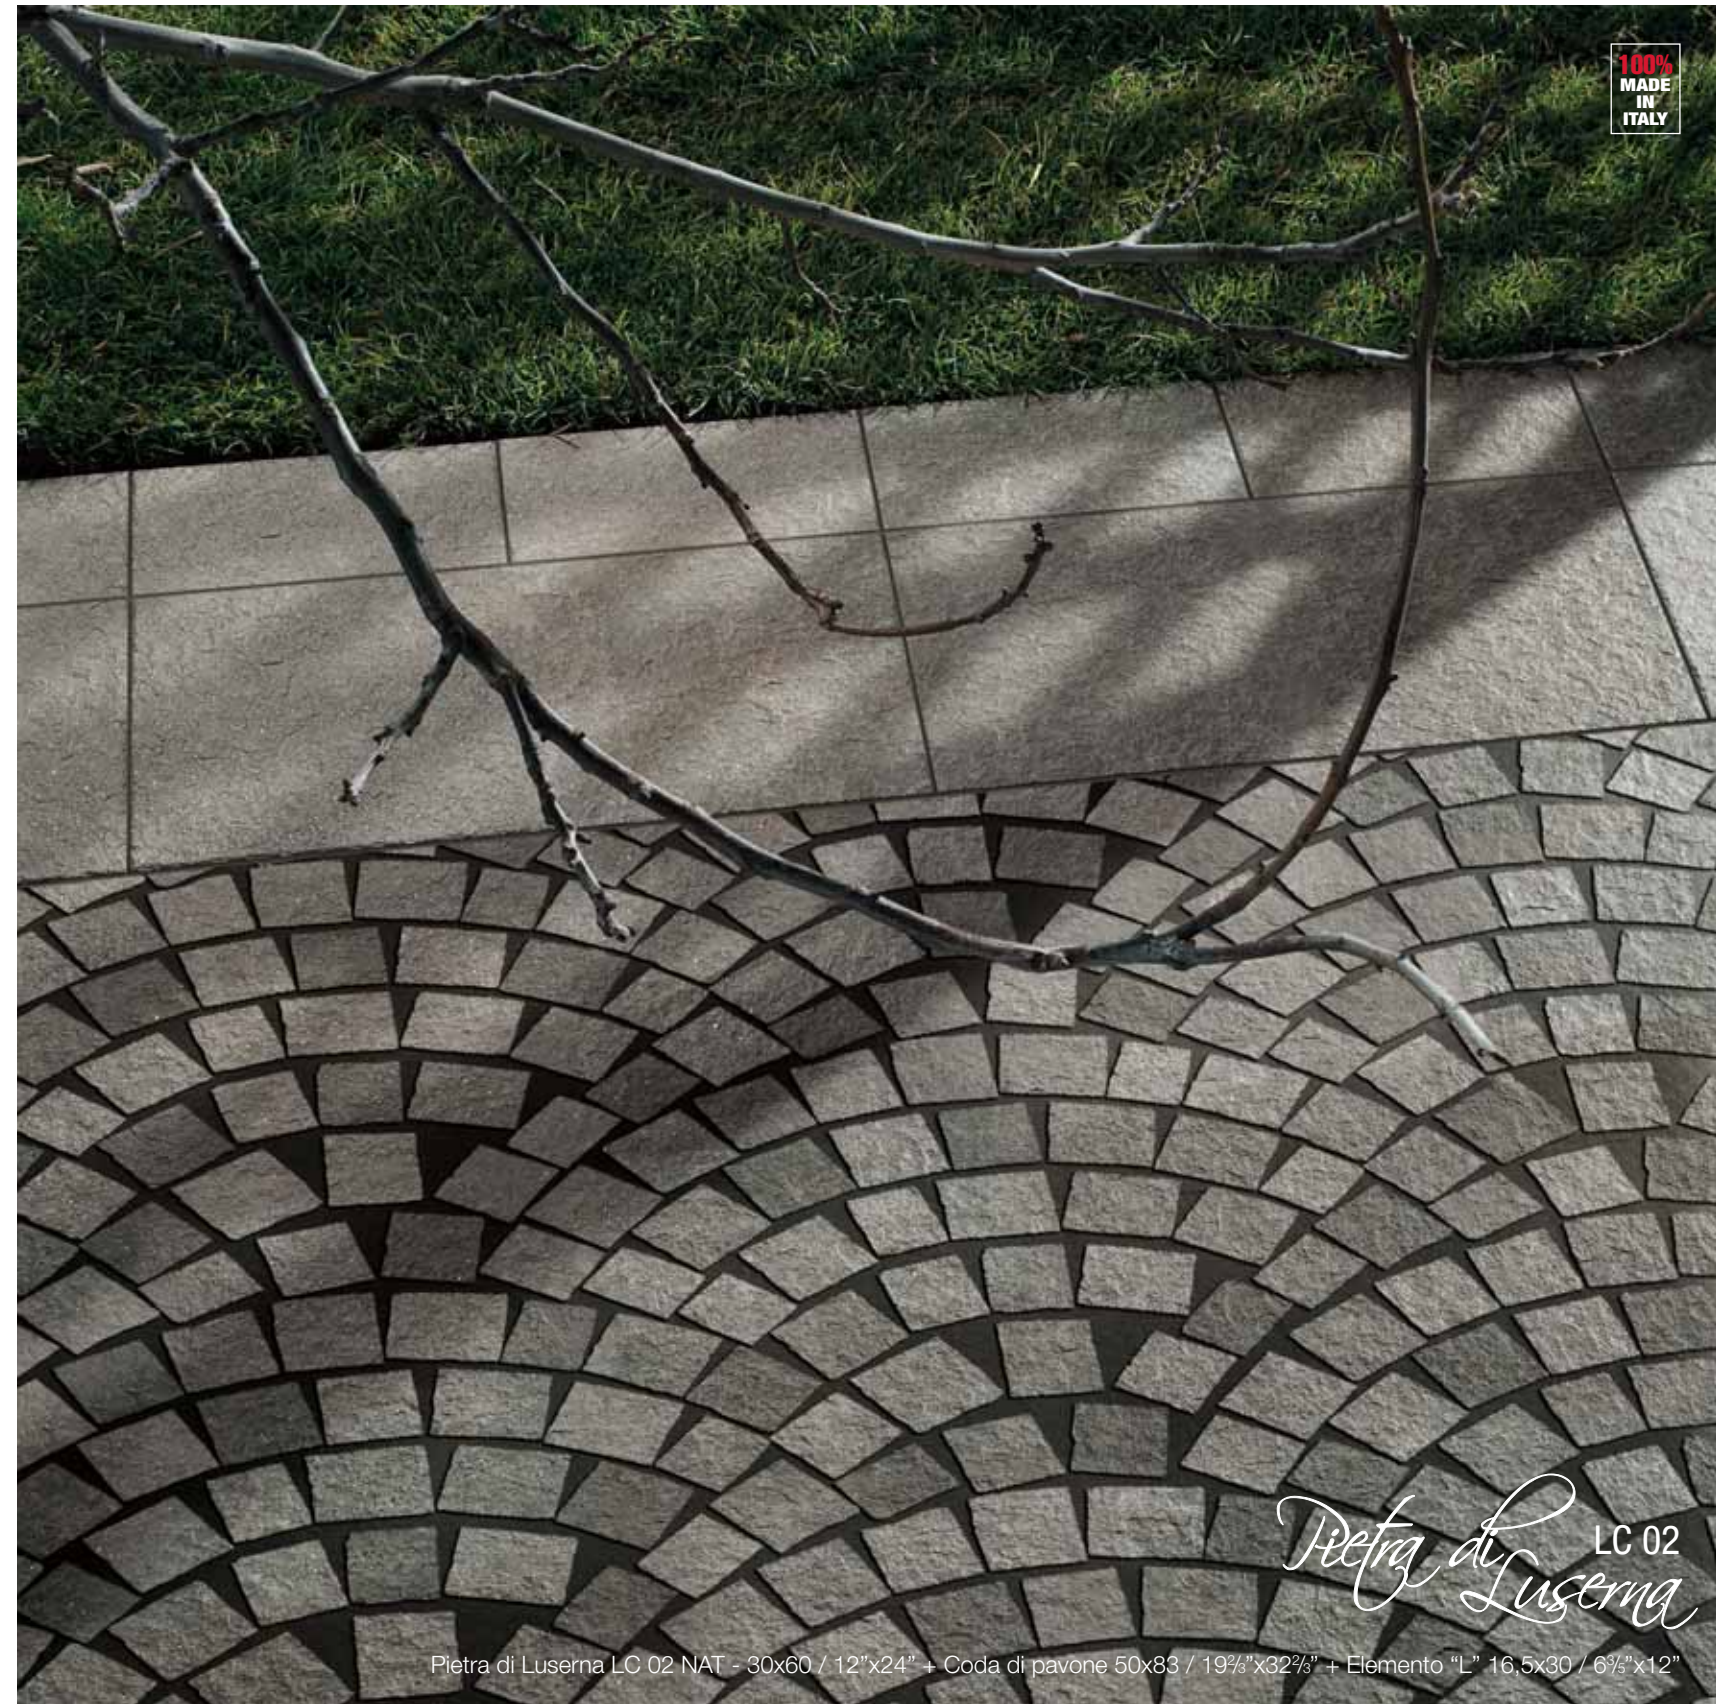

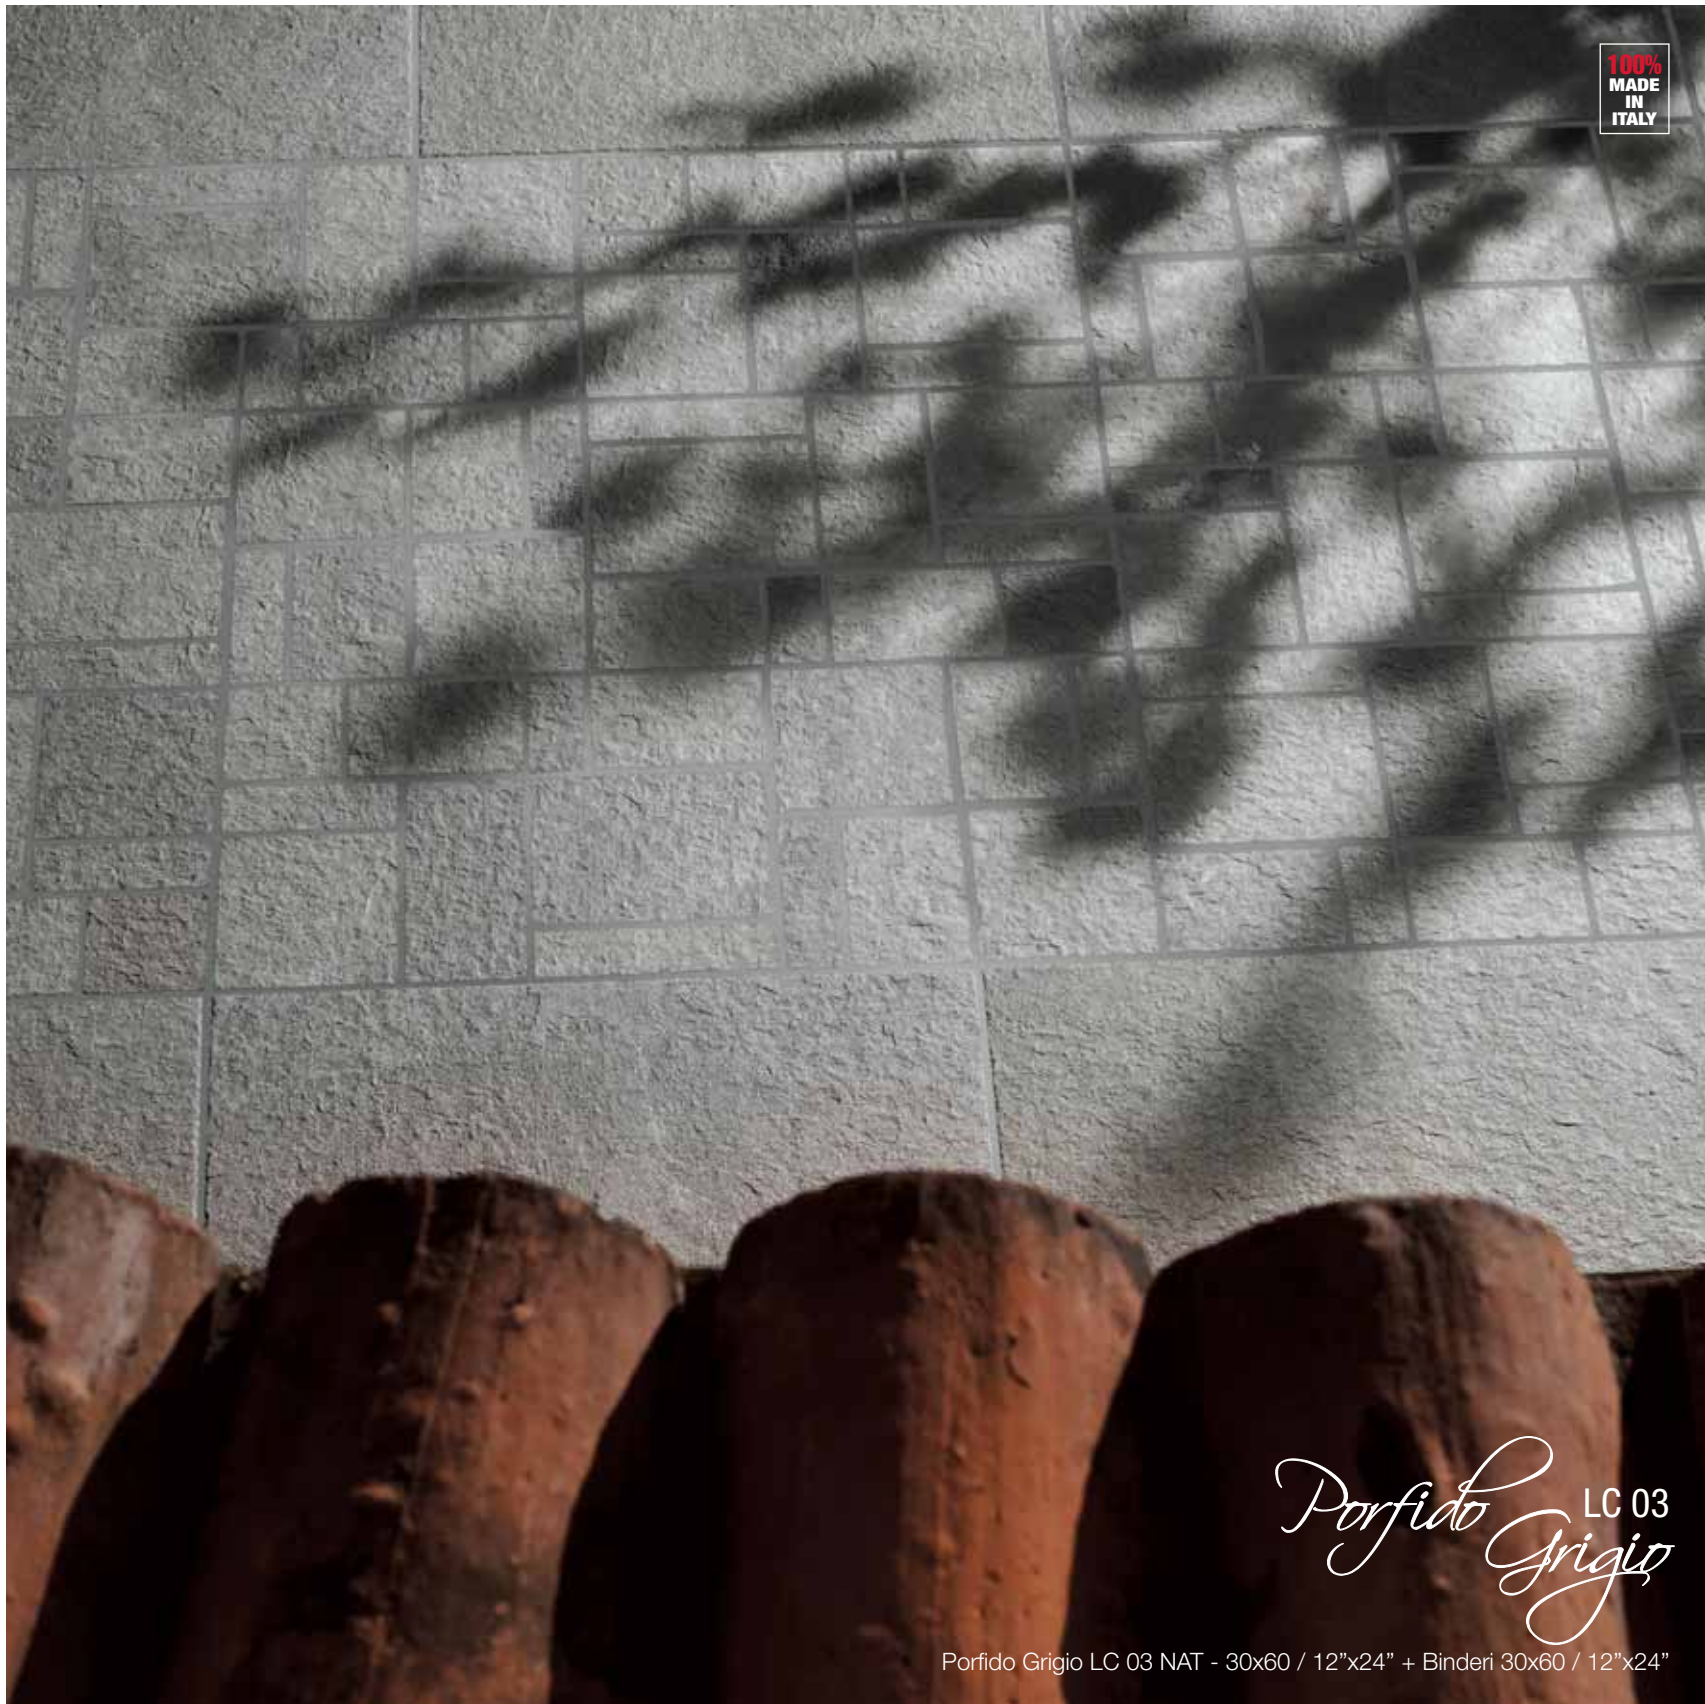

Porfido LC 03
Grigio

Porfido Grigio LC 03 NAT - 30x60 / 12"x24" + Binderi 30x60 / 12"x24"



Porfido LC 04
Perla

Porfido Perla LC 04 NAT - 30x60 / 12"x24" + 30x30 / 12"x12" + 15x15 / 6"x6"



FORMATI
SIZES - FORMATS - FORMATE - FORMATOS - ФОРМАТА



30x60x0,95
12"x24"x²/₅"
NAT



30x30x0,95
12"x12"x²/₅"
NAT




15x15x0,95
6"x6"x²/₅"
NAT

NAT: Naturale, non squadrato_ Natural surface, non squared



SKID RESISTANCE
ASTM C 1028-96
WET and DRY: ≥ 0,60



V3


MODERATA VARIAZIONE
MODERATE VARIATION
MÄSSIGE SCHÄTTIERUNG
VARIATION MODERÉE
MODERADA VARIACIÓN
УМЕРЕННОЕ ИЗМЕНЕНИЕ



V4


FORTE STONALIZZAZIONE
SUBSTANTIAL VARIATION
STARKE SCHÄTTIERUNG
EFFET DENUANCE TRÈS ACCENTUE
CONTRASTE DE TONALIDAD ELEVADO
СИЛЬНОЕ ОБЕСЦВЧИВАНИЕ

(porfido rosso)

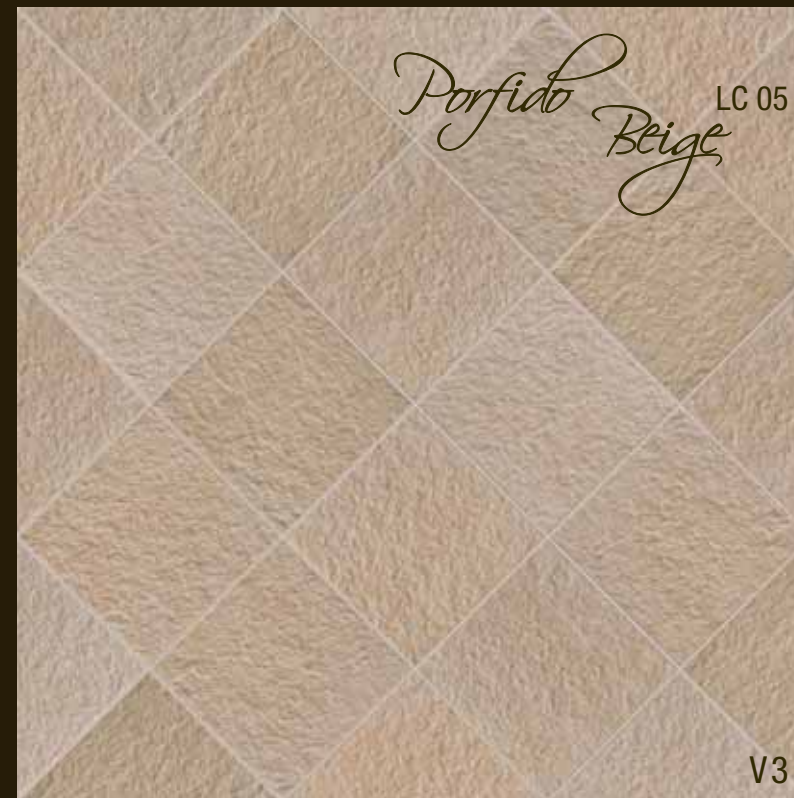


DECORI
DECORS - DEKORE - DECOR - DECOROS - ДЕКОРЫ

Decori disponibili in tutti i colori - Decors available in all colours

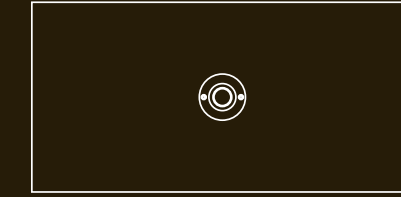


Illumina 30x60 / 12"x24"

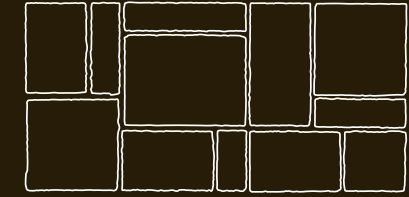

Binderi 30x60 / 12"x24"



Impieghi: camminamenti, giardini, aree non carrabili
Applications: Walkways, gardens, pedestrian areas

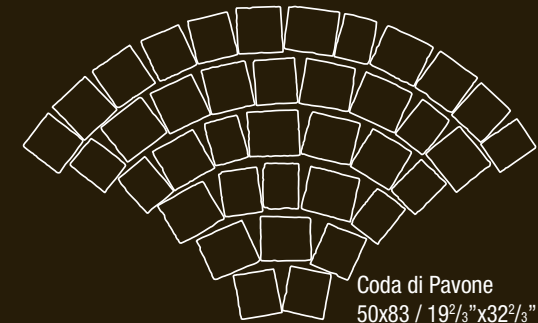


Coda di Pavone
50x83 / 19²/₃"x32²/₃"


PEZZI SPECIALI
SPECIAL PIECES - SONDERSTÜCKE - PIÈCES SPÉCIALES
PIEZAS ESPECIALES - СПЕЦИАЛЬНЫЕ ИЗДЕЛИЯ




Battiscopa NAT
8x30 / 3¹/₅"x12"



Elemento "L" NAT
16,5x30 / 6³/₈"x12"



Gradino Angolare "T" NAT
33x33 / 13"x13"















Gradino "T" NAT
30x33 / 12"x13"








Scamillo dx/sx NAT
9x30 / 3³/₈"x12"

Naturale - Natural - Natur/unpoliert - Naturelle - Natural - Натуральный


colours + sizes


												
	30x60 / 12"x24"	30x30 / 12"x12"	15x15 / 6"x6"	Bideri 30x60 / 12"x24"	Illumina* 30x60 / 12"x24"	Coda di Pavone 50x83 / 19 1/2"x32 1/2"	Battiscopa 8x30 / 3 1/5"x12"	Gradino Angolare 33x33 / 13"x13"	Gradino 30x33 / 12"x13"	Elemento "L" 16,5x30 / 6 1/2"x12"	Scamillo sx 9x30 / 3 1/5"x12"	Scamillo dx 9x30 / 3 1/5"x12"
	FORMATI SIZES FORMATS FORMATE FORMATOS ФОРМАТЫ			DECORI DEKORS DEKORE DECOR DECOROS ДЕКОРЫ			PEZZI SPECIALI SPECIAL PIECES SONDERSTÜCKE PIÈCES SPÉCIALES PIEZAS ESPECIALES ПЕЦАЛЬНЫЕ ЗДЕЛИЯ					
	NAT	NAT	NAT	NAT	NAT	NAT	NAT	NAT	NAT	NAT	NAT	
PORFIDO ROSSO	MH90	MI76	MI81	MI93	MI98	ML03	MI88	ML41	ML36	ML46	ML92	ML87
PIETRA DI LUSERNA	MH91	MI77	MI82	MI94	MI99	ML04	MI89	ML42	ML37	ML47	ML93	ML88
PORFIDO GRIGIO	MH92	MI78	MI83	MI95	ML00	ML05	MI90	ML43	ML38	ML48	ML94	ML89
PORFIDO PERLA	MH93	MI79	MI84	MI96	ML01	ML06	MI91	ML44	ML39	ML49	ML95	ML90
PORFIDO BEIGE	MH94	MI80	MI85	MI97	ML02	ML07	MI92	ML45	ML40	ML50	ML96	ML91



 peso lordo per scatola - gross weight per box Bruttogewicht pro Karton - poids brut per boîte peso bruto por caja - Вес брутто коробки	25,39	20,04	14,28	-	-	-	-	-	-	-	-	-
 pezzi per scatola - pieces for box Stück pro Karton - pièces pour boîte piezas por caja - Штук в коробке	7	11	30	2	1	2	16	4	8	10	16	16
 mq. scatola - mq. box mq. Karton - mq. boîte mq. caja - кв.м в коробке	1,26	0,99	0,675	-	-	-	-	-	-	-	-	-
 scatola/pallet - box/pallet Karton/Pallet - boîte/pallet caja/pallet - коробка в палете	40	48	80	-	-	-	-	-	-	-	-	-
 mq./pallet	50,40	47,52	54,00	-	-	-	-	-	-	-	-	-

V1  ASPETTO UNIFORME
UNIFORM APPEARANCE
EINHETLICHES AUSSEHEN
ASPECT UNIFORME
ASPECTO UNIFORME
ОДНОРОДНАЯ ПОВЕРХНОСТЬ

V2  LIEVE VARIAZIONE
SLIGHT VARIATION
LEICHTE SCHATTIERUNG
LEGERE VARIATION
LEGERA VARIACION
ЛЕГКОЕ ИЗМЕНЕНИЕ

V3  MODERATA VARIAZIONE
MODERATE VARIATION
MÄSSIGE SCHATTIERUNG
VARIATION MODERÉE
MODERADA VARIACION
УМЕРЕННОЕ ИЗМЕНЕНИЕ
















V4  FORTE STONALIZZAZIONE
SUBSTANTIAL VARIATION
STARKE SCHATTIERUNG
EFFET DENUANCE TRÈS ACCENTUE
CONTRASTE DE TONALIDAD ELEVADO
СИЛЬНОЕ ОБЕСЦВЕЧИВАНИЕ

* Decoro con inserto luminoso ad energia solare, disponibile scheda tecnica per ulteriori specifiche. / Special trim with lighting photovoltaic system, technical information available. / Dekor mit fotovoltaik Einlegen, technisches Merkblatt auf Anfrage verfügbar. / Decor avec insert photovoltaïque, disponible la fiche technique pour ultérieures information. / Decoro con inserto luminoso fotovoltaico, disponible ficha tecnica para mayores detalles técnicos.


CARATTERISTICHE TECNICHE

Technical data Technische Daten Caractéristiques techniques Característica técnicas Технические арактеристики

STANDARD EN 14411 - G

CARATTERISTICHE TECNICHE TECHNISCHE DATEN CARACTÉRISTIQUES TECHNIQUES CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ	NORMA STANDARD NORME NORMA ЗНАЧЕНИЯ	VALORI PRESCRITTI DALLE NORME EN 14411 - G INTERNATIONAL STANDARDS EN 14411 - G INTERNATIONALE NORMWERTE EN 14411 - G VALEURS PREVUES PAR LES NORMES INTERNATIONALES EN 14411 - G VALORES PREVISTOS POR LAS NORMAS EN 14411 - G ПРЕДУСМОТРЕННЫЕ СТАНДАРТОМ EN 14411-G	*VALORE MEDIO MIRAGE MIRAGE AVERAGE VALUE MIRAGE MITTELWERT VALEURS MOYEN MIRAGE VALOR MEDIO MIRAGE СРЕДНЕЕ ЗНАЧЕНИЕ MIRAGE
 LATI SIDES SEITEN CÔTES CANTOS РАЗМЕРЫ СТОРОН	EN ISO 10545-2	± 0,6% MAX	±0,3%
 SPESSORE THICKNESS DICKE ÉPAISSEUR ESPESOR ТОЛЩИНА	EN ISO 10545-2	± 5,0% MAX	± 3%
 RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES GERADLINIGKEIT DER KANTEN RECTITUDE DES ARÊTES RECTIDUD DE LOS CANTOS КОСОУГОЛЬНОСТЬ	EN ISO 10545-2	± 0,5% MAX	± 0,3%
 ORTOGONALITÀ RECTANGULARITY RECHTWINKLIGKEIT PERPENDICULARITÉ ORTOGONALIDAD КРИВИЗНА СТОРОН	EN ISO 10545-2	± 0,6% MAX	± 0,3%
 PLANARITÀ SURFACE FLATNESS EBENFLÄCHIGKEIT PLANEITÉ DE SURFACE PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ	EN ISO 10545-2	± 0,5% MAX	± 0,3%
 ASSORBIMENTO D'ACQUA WATER ABSORPTION WASSERAUFNAHME ABSORPTION D'EAU ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ	EN ISO 10545-3	≤ 0,5%	0,02%
 RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE BIEGEFESTIGKEIT RESISTENCIA A LA FLEXION RESISTENCIA A LA FLEXION ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (< 7,5 mm) R ≥ 35 N/mm².	S 2.028 N R 67,0 N/mm².
 RESISTENZA ALL'URTO IMPACT RESISTANCE STOSSFESTIGKEIT RESISTANCE AUX CHOCES RESISTENCIA A LOS GOLPES УДАРОСТОЙКОСТЬ	EN ISO 10545-5	METODO DI PROVA DISPONIBILE TESTS METHOD AVAILABLE PRUEFUNG VERFUGBAR METHODE D'ESSAI DISPONIBILE METODO DE LABORATORIO DISPONIBILE ДОСТУПНЫЙ МЕТОД ИСПЫТАНИЯ	0,84
 RESISTENZA ALL'ABRAZIONE ABRASION RESISTANCE ABRIEBFESTIGKEIT RESISTENCIA A L'ABRASION RESISTENCIA A LA ABRASION СТОЙКОСТЬ К ИСТИРАНИЮ	EN ISO 10545-6	≤ 175 mm³	135 mm³
 COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL-EXPANSION LINEARER WÄRMEAUSSDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE COEFFICIENTE DE DILATACION TERMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ	EN ISO 10545-8	METODO DI PROVA DISPONIBILE TESTS METHOD AVAILABLE PRUEFUNG VERFUGBAR METHODE D'ESSAI DISPONIBILE METODO DE LABORATORIO DISPONIBILE ДОСТУПНЫЙ МЕТОД ИСПЫТАНИЯ	6,2x10 ⁻⁶ °C ⁻¹
 RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCES THERMIQUES RESISTENCIA A LOS CHOCQUES TÈRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ	EN ISO 10545-9	METODO DI PROVA DISPONIBILE TESTS METHOD AVAILABLE PRUEFUNG VERFUGBAR METHODE D'ESSAI DISPONIBILE METODO DE LABORATORIO DISPONIBILE ДОСТУПНЫЙ МЕТОД ИСПЫТАНИЯ	NESSUN DANNO NO DAMAGE KEIN SCHADEN AUCUN DOMMAGE NINGUN DANO БЕЗ ПОВРЕЖДЕНИЙ
 RESISTENZA AL GELO FROST RESISTANCE FROSTBESTÄNDIGKEIT RESISTANCE AU GEL RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ	EN ISO 10545-12	NESSUN DANNO NO DAMAGE KEIN SCHADEN AUCUN DOMMAGE NINGUN DANO БЕЗ ПОВРЕЖДЕНИЙ	NESSUN DANNO NO DAMAGE KEIN SCHADEN AUCUN DOMMAGE NINGUN DANO БЕЗ ПОВРЕЖДЕНИЙ
 RESISTENZA ALL'ATTACCO CHIMICO RESISTANCE TO CHEMICALS CHEMIKALIENBESTÄNDIGKEIT RESISTANCE A L'ATTAQUE CHIMIQUE RESISTENCIA QUÍMICA ХИМИЧЕСКАЯ СТОЙКОСТЬ	EN ISO 10545-13	UB MIN. UB MIN. UB MIN. UB MIN. UB MIN. UB MIN.	UA ULA UHA
 RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ	EN ISO 10545-14	METODO DI PROVA DISPONIBILE TESTS METHOD AVAILABLE PRUEFUNG VERFUGBAR METHODE D'ESSAI DISPONIBILE METODO DE LABORATORIO DISPONIBILE ДОСТУПНЫЙ МЕТОД ИСПЫТАНИЯ	5
 SCIVOLITÀ SKID RESISTANCE RUTSCHWEERT GLISSANCE ADHERENCIA СКОЛЬЗКОСТЬ	ASTM	≥ 0,60	≥ 0,60
	DM. 236/89 BCRA	> 0,40	> 0,40
	DIN 5130	-	R12
	ENV 12633	≥ CL1	CL3
	DIN 51097	-	A + B + C

41026 PAVULLO (MO) ITALY
Via Giardini nord, 225
Tel. +39 0536 29.611
Telefax +39 0536 21.065
info@mirage.it
www.mirage.it

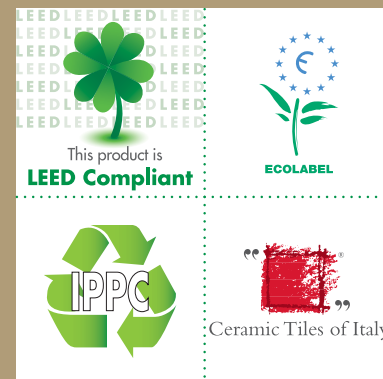

* COME DA CERTIFICATO _ ACCORDING TO TEST REPORT _ LAUT ZEUGNISS _ SELON LE CERTIFICAT _ COMO RESULTA POR EL CERTIFICADO _ В СООТВЕТСТВИИ С СЕРТИФИКАТОМ
NR. 5340/2009; NR. 672/2009; NR. 543/2009; NR. 579/2009; NR. 578/2009; NR. 581/2009; NR. 501/2009; NR. 500/2009; NR. 547/2009; NR. 548/2009; NR. 540/2009; NR. 530/2009; NR. 534/2009;
NR. 3989/2009; NR. 471/2009.